
ORDER GUIDE - POWER AND CONTROL

UNIVERSAL DIMMABLE | 288W

PART NUMBER

POWER SUPPLY

Series	Family	Type	Wattage	Voltage
NF	PS	UNV	288W	24V

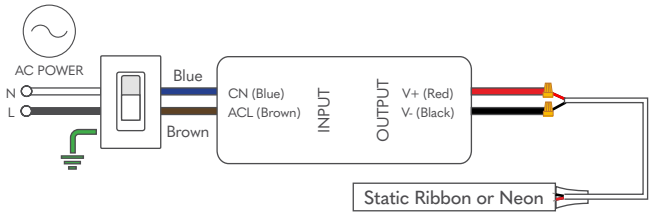

Notes:

PHYSICAL

Voltage Range	120 ~ 277 VAC
Frequency	47 ~ 63 Hz
Current	3.4 A / 100 VAC
Inrush Current	35 A / 120 VAC 43 A / 277 VAC
Efficiency	87% @ 120 VAC 91% @ 277 VAC
Voltage	24 VDC
Current	3x4 A
Load Regulation	±1%

ENVIRONMENT


Protection Rating	cULus Listed, UL 8750, Class 2, Type HL rated, FCC
Operating Temp	-40° to 140° F (-40° to 60° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC
Warranty	2 - 5 Years (based on warranty of Linear/Neon purchased)
Dimming	PWM / PFM | IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V | MLV / ELV

To meet local / national codes, this driver may require mounting in approved UL Enclosure.
1-10V ANSI C137.1 Compliant, "Electronic Off"

DIMENSIONS

Weight	5.51 lbs



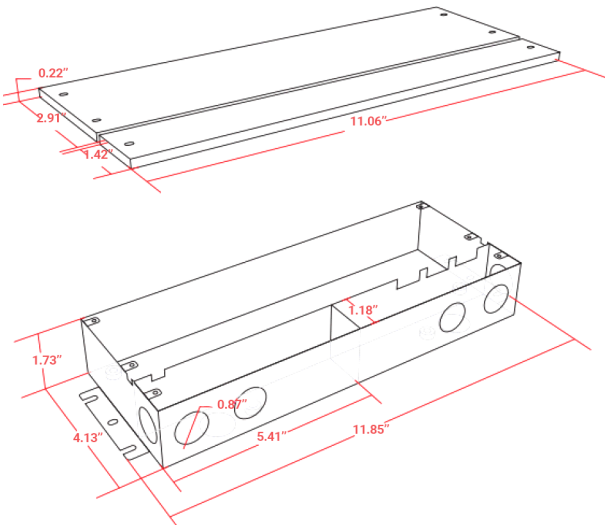

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT	FIXTURE	PHASE	DATE