Design Series | Static Color

NOVA FLEX




- Static red, green, blue, and yellow LED strips, IP65 and IP68, to help deliver your branded look or desired mood and ambiance, indoors or outdoors
- 5yr warranty
- cULus listed


Physical

IP Rating	IP65, IP68
Ambient Temp	-15° to 140°F (-25° to 60°C)
Mounting Options	Channels | Clips | 3M Adhesive
Cut Length	1.6W: 3.93" (99.82mm) 3.0W: 1.96" (49.78mm)
Min. Bend Diameter (top bend)	IP65: 0.79" (20mm); IP68: 1.97" (50mm)
Dimensions	See below

1.6W

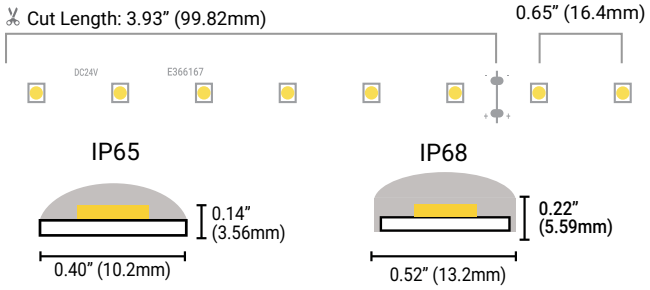

3.0W

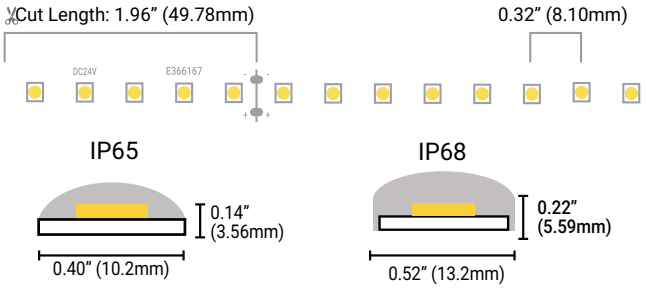

Quality, Reliability, Safety

Warranty	5 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed

PLEASE NOTE: in 2018-2019, our Static-Red was certified as Wildlife Lighting by the FWC.

Electrical

Voltage	24V
Power	1.6, 3.0 W/ft
Max Run (adjusted for cut length)	1.6W: 59.93' (18.27M) 3.0W: 31.85' (9.71M)
Wire Quantity	2 wires
Lead Wire Options	Lead Default: 48" (1.22M) IP65: 2" minimum (50.8mm) IP68: 3" minimum (76.2mm) Quick Connect: 3" - 120" (76.2mm - 3.05M)
Jumper	3" minimum (76.2mm)

Quick Links | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Please note, we can run specific configurations of light and channel in our gonio, with a five day lead-time. Please consult with your Nova Flex Sales rep.

Product Overview: SKUs, Lead Times & Performance Metrics

IP65

SKU	Power W/Ft	Lead Time	Output Lm/Ft
NF-R-IP65-60-24V	1.6	Quick ship	27
NF-G-IP65-60-24V	1.6	Quick ship	43
NF-B-IP65-60-24V	1.6	Quick ship	9
NF-Y-IP65-60-24V*	1.6	6-8 weeks	20
NF-R-IP65-120-24V	3.0	Quick ship	29
NF-G-IP65-120-24V	3.0	Quick ship	49
NF-B-IP65-120-24V	3.0	Quick ship	11
NF-Y-IP65-120-24V*	3.0	6-8 weeks	20

Actual values can vary +/- 10%.
328' MOQ.* **Less than MOQ orders can sometimes be accommodated; this can be discussed at the time of customer quote or PO.

IP68

SKU*	Power W/Ft	Lead Time	Output Lm/Ft
NF-R-IP68-60-24V	1.6	6-8 weeks	25
NF-G-IP68-60-24V	1.6	6-8 weeks	41
NF-B-IP68-60-24V	1.6	6-8 weeks	9
NF-Y-IP68-60-24V	1.6	6-8 weeks	19
NF-R-IP68-120-24V	3.0	6-8 weeks	28
NF-G-IP68-120-24V	3.0	6-8 weeks	47
NF-B-IP68-120-24V	3.0	6-8 weeks	10
NF-Y-IP68-120-24V	3.0	6-8 weeks	19

Actual values can vary +/- 10%.
328' MOQ for all.* **Less than MOQ orders can sometimes be accommodated; this can be discussed at the time of customer quote or PO.