ANGLED 3030 | CHANNEL

NOVA FLEX




Physical

Material	Anodized Aluminum
Length	2M

Channel	Light Loss	SKU
Silver	10%	NF-CH-3030-2M-SL
Black	20%	NF-CH-3030-2M-BK*
White	0%	NF-CH-3030-2M-WT*

*8-10 weeks | MOQ 50pcs, 2M lengths


Dimensions - Curved

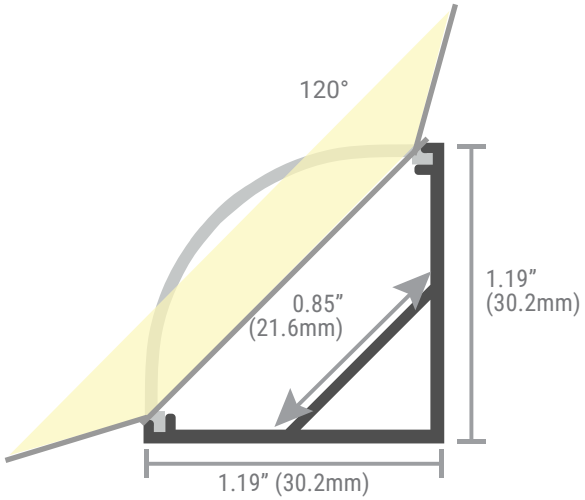


Lens	Light Transmission	SKU
Curved - Clear	92%	NF-CH-3030-C/CLEAR/CR-2M*
Curved - Soft	78%	NF-CH-3030-C/SOFT/CR-2M
Curved - Black	25%	NF-CH-3030-C/BLACK/CR-2M*
Square - Clear	92%	NF-CH-3030-C/CLEAR/SQ-2M*
Square - Soft	78%	NF-CH-3030-C/SOFT/SQ-2M*
Square - Black	25%	NF-CH-3030-C/BLACK/SQ-2M*

*8-10 weeks | MOQ 50pcs, 2M lengths

Dimensions - Square

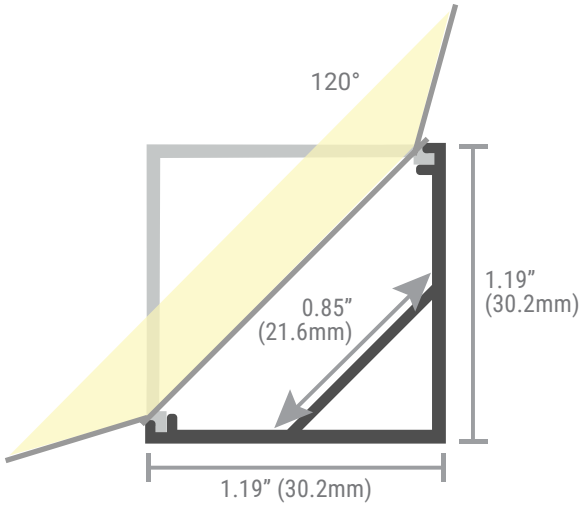

Mounting Options




Direct Mount

Surface mount using 5 screws per 3.28’ (1M).



Standard Clip


NF-CH-3030-CLIP





Universal Adjustable Clip

NF-CH-UNV-CLIP/ADJ
Angles: 0°/15°/30°/45°/60°/75°/90°
Must be used with Standard Clips.



Notes

- Nova Flex automatically calculates endcap and mounting accessory qty requirements per actual run lengths
- Custom lengths and colors from Nova Flex factory are available. Additional fees apply.
- Lenses are suitable for outdoor use relative to UV and water exposure in accordance with UL746C

Quick Links | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Please note, we can run specific configurations of light and channel in our gonio, with a five day lead-time. Please consult with your Nova Flex Sales rep.