NEON | Micro | Static Color


NOVA FLEX



- Spec-grade, flexible silicone side-bend neon for indoors and outdoors
- Very small, 10mm x 10mm size to help meet your most demanding design challenges
- Professional custom-injection molded finish for highly refined look
- Available in static red, blue, green and amber
- Salt and UV resistant (anti-yellowing)
- 5yr warranty, cULus listed, IK07 protection

Physical

IP Rating	IP67
Ambient Temp	-40°F to 122°F (-40°C to 50°C)
Mounting Options	Channels | Clips
Cut Length	3.28" (8.33mm); *this info is for reference only; product is not to be modified in the field*
Min. Bend Diameter	3.94" (10mm), side bend
Dimensions	*See Below*



Quality, Reliability, Safety

Warranty	5 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed; IK07 protection

c UL us LISTED E366167

Electrical

Voltage	24V
Power	1.37 W/ft
Max Run (adjusted for cut length)	68.33' (20.8M) *We recommend reducing max run to 22.97' (7M) if used for outdoor facades*
Wire Quantity	2 wires
Lead Wire Options	3.28' (1M) or 9.84' (3M)
Jumper	11.81" (300mm)

Quick Links | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Please note, we can run specific configurations of light and channel in our gonio, with a five day lead-time. Please consult with your Nova Flex Sales rep.

Product Overview: SKUs, Lead Times & Performance Metrics

SKU	*Lead Time*	*Output Lm/Ft*
NF-MCN-IP67-24V-R-AIM	4-6 weeks	15
NF-MCN-IP67-24V-G-AIM	4-6 weeks	61
NF-MCN-IP67-24V-B-AIM	4-6 weeks	9
NF-MCN-IP67-24V-A-AIM	4-6 weeks	15

Actual values can vary +/- 10%.


IP67 Front Connectors and End Cap




End Feed



Bottom Feed



Side Feed




End Cap

Compatible Channels


All mounting options have a 4-6 week lead-time

SKU	Dimensions	Mounting
NF-CH-NEON-MCN-SR-2M-SL 	width: 0.54” (13.8mm) height: 0.55” (14mm) length: 6.56’ (2M)	**Straight (Rigid) Aluminum Channel** • Includes pre-drilled holes and mounting screws. Use anchors if needed. • *See Installation Notes, next page*
NF-CH-NEON-MCN-SR-CLIP 	width: 0.54” (13.8mm) height: 0.55” (14mm) length: 0.79” (20mm)	**Clip** • For curves/shapes: place one clip near each end, then approximately every 6” (152.4mm). More clips may be needed to accomplish your desired shape / curve. • For straights: place one clip near each end, then approximately every 8” (203.2mm). • Includes pre-drilled hole and screw. Use anchor if needed. • See additional Installation Notes, next page
NF-CH-NEON-MCN-SPACER 		**Spacers (for use with rigid aluminum channel)** *Required for use outdoors* • *Keep 0.2” (5mm) gap between channels to manage expansion/ contraction, especially on facades* • *Ensures vertical and horizontal alignment between channels to prevent damge to the fixture, and to make the install process easier* *Strongly recommended for use indoors* • *Ensures vertical and horizontal alignment between channels to prevent damage to the fixture, and to make the install process easier*
NF-CH-NEON-MCN-BRKT-ROT 	width: 1.77” (45mm) height: 1.57” (40mm) length: 0.98 (25mm)	**Rotary Locking Bracket (for use with rigid aluminum channel)** • Includes screw(s) for mounting channel to bracket, and bracket to mounting surface. Use anchors if needed.
NF-CH-NEON-MCN-BEND-1M-SL 	width: 0.54” (13.8mm) height: 0.55” (14mm) length: 3.28’ (1M)	Bendable Channel • Includes pre-drilled holes and mounting screws. Use anchors if needed. • Minimum bend diameter w/toothed side inwards: 9.84” (250mm) • Minimum bend diameter w/toothed side outwards: 3.94” (100mm) • See Installation Notes, next page
NF-CH-NEON-MCN-FLNG-2M-SL 	width (bottom): 0.54” (13.8mm) width (top, w/flanges): 0.86” (21.8mm) height: 0.55” (14mm) length: 6.56’ (2M)	Silver Rigid Flanged Aluminum Channel • Includes pre-drilled holes and mounting screw. Use anchors if needed. • See Installation Notes, next page

Installation Notes

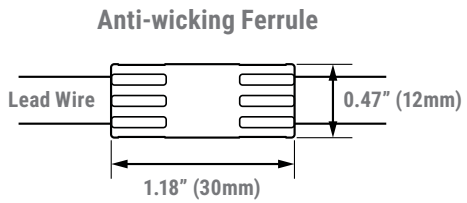

Please note, this helps prevent water ingress into the fixture—do NOT cut off.

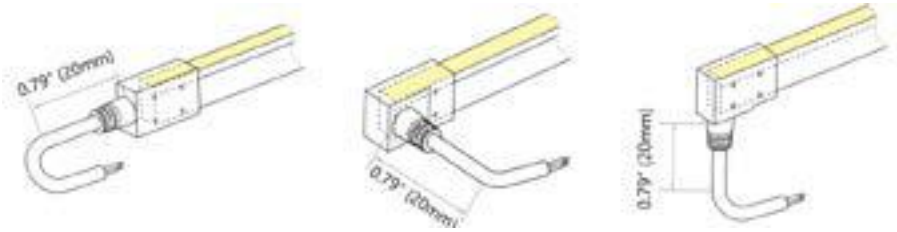

Please leave a 0.79" (20mm) straight on the lead wire before bending. Extreme tension on the lead-wire can cause breakage at the solder points.

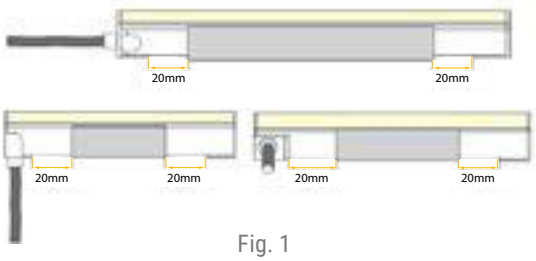


Fig. 1

For indoor installations:


- Bottom-feed: for the lead-wire end, the bottom/edge of the channel can be notched on the end with the lead-wire (with drill bit), to allow clearance for the lead wire; in this case, the fixture can run to the end of the channel. If the channel isn't notched, please leave a 0.79" (20mm) gap from the inside edge of the lead wire to the edge of the channel, to allow proper clearance for the lead wire. The endcap end can rest inside the channel.
- End-feed: the molded endcaps on each end can rest inside the channel
- Left or right feed: please leave a 0.79" (20mm) gap from the inside edge of the lead wire to the edge of the channel, to allow proper clearance for the lead wire. The endcap end can rest inside the channel.

For outdoor installations:

- The molded endcaps on each end of the neon should rest outside the channel (see Fig. 1). Please leave a 0.79" (20mm) gap between the outside edge of the channel and the inside edge of the endcap, to allow for expansion and contraction.
- Additionally, please leave a 0.2" (5mm) gap between channels to allow for expansion and contraction, and ensure the channels are aligned vertically and horizontally. Nova spacer bracket part# NF-CH-NEON-MCN-SPACER can be used to accomplish this.
- When mounting on outside facades, across joints/seams on the facade, use one of the following two methods:

Seam-mounting method 1

Ensure the mounting channel extends across the seam to protect the light.

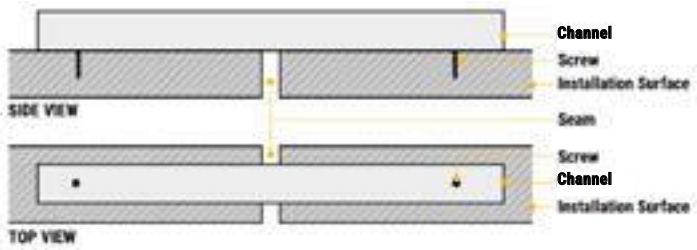

Secure screws on both sides of the seams for added reliability

Seam-mounting method 2

Match the light length to each segments.

