
Design Series | RGB


NOVA FLEX

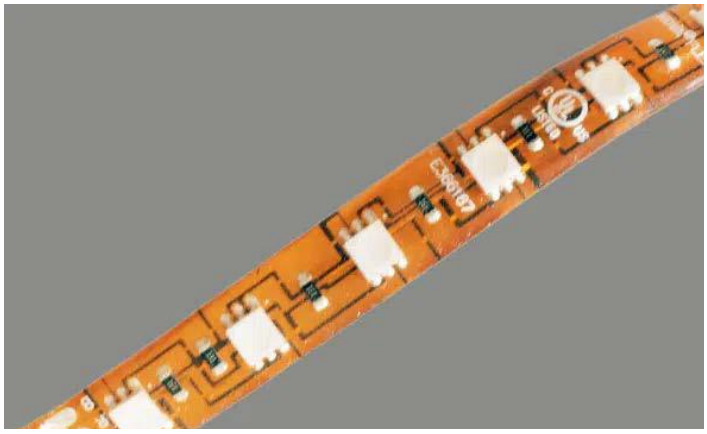

- RGB strip provides many color changing options to help create unique, fun and branded environments
- IP65 and IP68 for indoor and outdoor use
- 3yr warranty
- cULus listed

Physical

IP Rating	IP65, IP68
Ambient Temp	-15° to 140°F (-25° to 60°C)
Mounting Options	Channels | Clips | 3M Adhesive
Cut Length	3.91” (99.3mm)
Min. Bend Diameter (top bend)	IP65: 0.79” (20mm); IP68: 1.97” (50mm)
Dimensions	See below

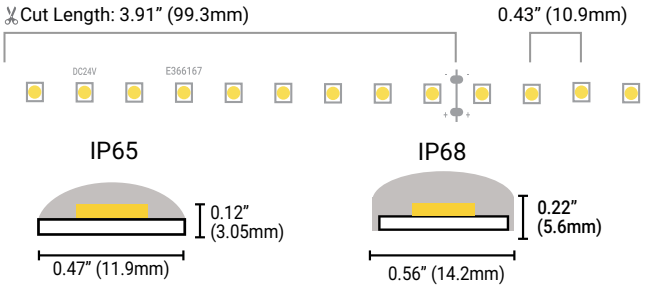

Quality, Reliability, Safety

Warranty	3 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed

Electrical

Voltage	24V
Power	4.9 W/ft
Max Run (adjusted for cut length)	19.55’ (5.96M)
Wire Quantity	4 wires
Lead Wire Options	Lead Default: 48” (1.22M) IP65: 2” minimum (50.8mm) IP68: 3” minimum (76.2mm)
Jumper	3” minimum (76.2mm)

Product Overview: SKUs, Lead Times & Performance Metrics

IP65 SKU	*Lead Time*	*Red Lm/Ft*	*Green Lm/Ft*	*Blue Lm/Ft*
NF-RGB-IP65-60-24V*	6-8 weeks	27	76	12
IP68 SKU				
NF-RGB-IP68-60-24V*	6-8 weeks	26	72	11

Actual values can vary +/- 10%.
**328’ MOQ. Less than MOQ orders can sometimes be accommodated; this can be discussed at the time of customer quote or PO*

Quick Links | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Please note, we can run specific configurations of light and channel in our gonio, with a five day lead-time. Please consult with your Nova Flex Sales rep.