
COB | High Output | Static White

NOVA FLEX

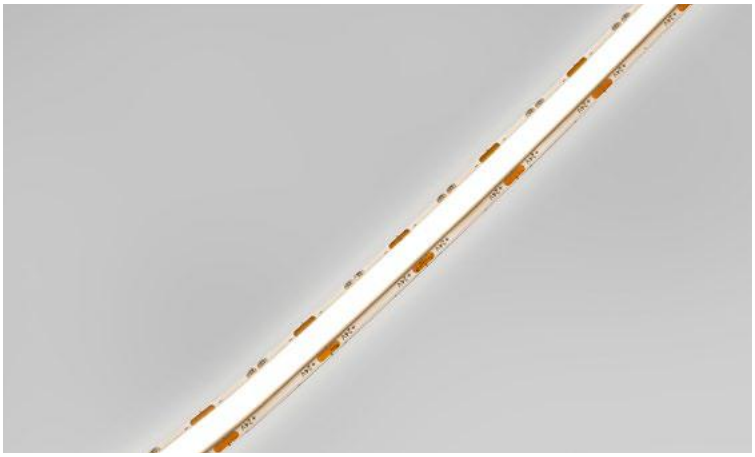



These COB strips combine the linearity inherent to COB with output options that can reach over 900L/ft.

- IP20 and IP67
- CRI 90
- cULus listed
- 5yr warranty


Physical

Environment	IP20, IP67
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	1.09" (27.7mm)
Min. Bend Diameter (top bend)	1.57" (40mm)
Dimensions	*See below*

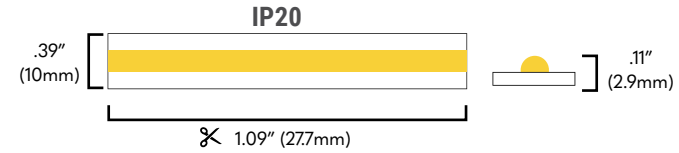

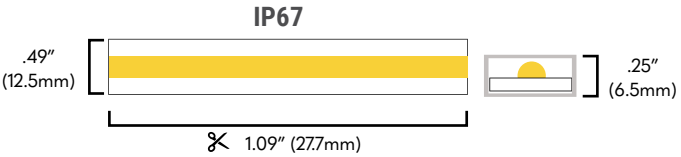

IP67 Boot Dimensions

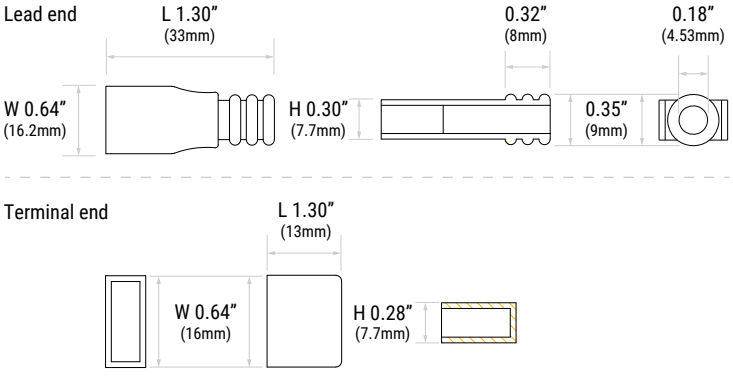

Quality, Reliability, Safety

Warranty	5 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	50,000 hours
Certifications	cULus listed
SDCM	<=3


Electrical

Voltage	24V
Power	5.9 w/ft
Max Run Length adjusted for cut length	16.4' (5M)
Wire	2 wires
Lead Wire	Default: 48" (1.22M) IP20: 2" minimum (50.8mm) IP67: 3" minimum (76.2mm) Quick Connect: 3" - 120" (76.2mm - 3.05M)
Jumper	3" minimum (76.2mm)

Quick Link | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Static White

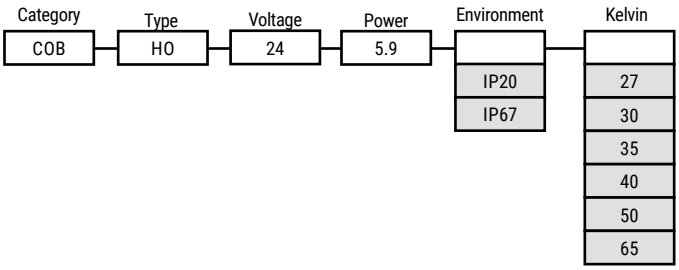

Static White Output

High Output IP20			Output	Efficacy
Product SKUs	*Lead Time*	*CCT*	*Lm/Ft*	*Lm/W*
COB-HO-24-5.9-IP20-27	Quick ship	2700K	859	146
COB-HO-24-5.9-IP20-30	Quick ship	3000K	878	150
COB-HO-24-5.9-IP20-35	Quick ship	3500K	927	158
COB-HO-24-5.9-IP20-40	Quick ship	4000K	931	159
COB-HO-24-5.9-IP20-50	5-7 weeks*	5000K	935	160
COB-HO-24-5.9-IP20-65	5-7 weeks*	6500K	939	160

High Output IP67			Output	Efficacy
Product SKUs	*Lead Time*	*CCT*	*Lm/Ft*	*Lm/W*
COB-HO-24-5.9-IP67-27	5-7 weeks*	2700K	808	138
COB-HO-24-5.9-IP67-30	5-7 weeks*	3000K	835	143
COB-HO-24-5.9-IP67-35	5-7 weeks*	3500K	839	143
COB-HO-24-5.9-IP67-40	5-7 weeks*	4000K	888	151
COB-HO-24-5.9-IP67-50	5-7 weeks*	5000K	894	152
COB-HO-24-5.9-IP67-65	5-7 weeks*	6500K	890	152

**Note: Minimum order quantity of 82' (25M)*

Actual values can vary +/- 10%.