
COB | RGBW

NOVA FLEX

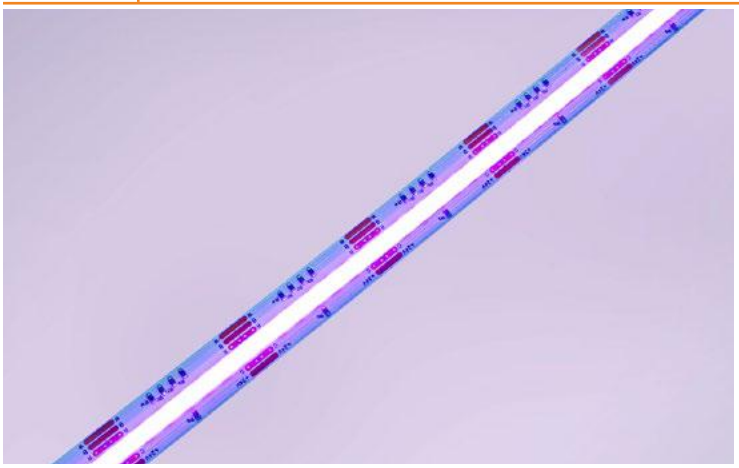



These strips combine the linearity inherent to COB with the wide variety of color changing options that are possible with RGBW.

- IP20 and IP67
- cULus listed
- 5yr warranty


Physical

Environment	IP20, IP67
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	1.31" (33.3mm)
Min. Bend Diameter (top bend)	1.57" (40mm)
Dimensions	*See below*

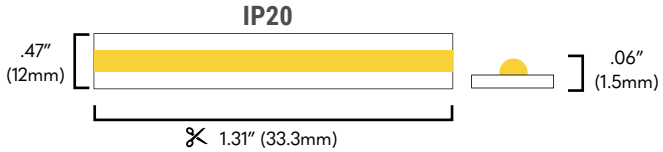

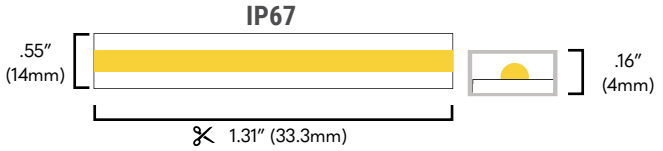

IP67 Boot Dimensions

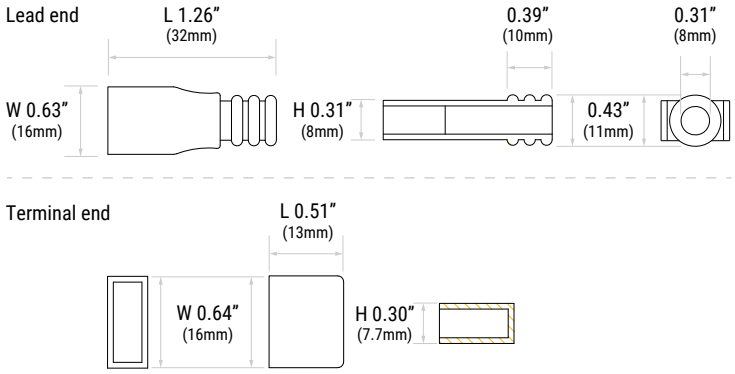

Quality, Reliability, Safety

Warranty	5 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed


Electrical

Voltage	24V
Power	5.5 w/ft
Max Run Length adjusted for cut length	17.5' (5.33M)
Wire	5 wires
Lead Wire	Default: 48" (1.22M) IP20: 2" minimum (50.8mm) IP67: 3" minimum (76.2mm) Quick Connect: 3" - 120" (76.2mm - 3.05M)
Jumper	3" minimum (76.2mm)

Quick Link | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

RGBW

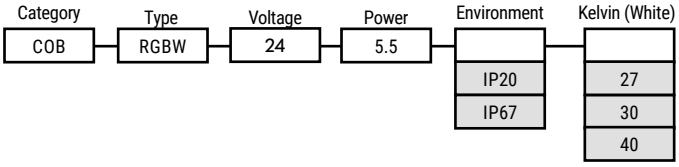

RGBW Output

RGBW (5.5W) *Product SKUs*	*Lead Time*	*CCT*	Output (W) *Lm/Ft*	Output (R) *Lm/Ft*	Output (G) *Lm/Ft*	Output (B) *Lm/Ft*
COB-RGBW-24-5.5-IP20-27	5-7 weeks*	2700K	99	33	126	18
COB-RGBW-24-5.5-IP20-30	Quick ship	3000K	115	40	138	20
COB-RGBW-24-5.5-IP20-40	Quick ship	4000K	111	35	88	20
COB-RGBW-24-5.5-IP67-27	5-7 weeks*	2700K	94	31	119	17
COB-RGBW-24-5.5-IP67-30	Quick ship	3000K	109	38	131	19
COB-RGBW-24-5.5-IP67-40	Quick ship	4000K	98	33	83	19

**Note: 82' (25M) minimum order quantity*

Actual values can vary +/- 10%.