

Design Series | RGBW

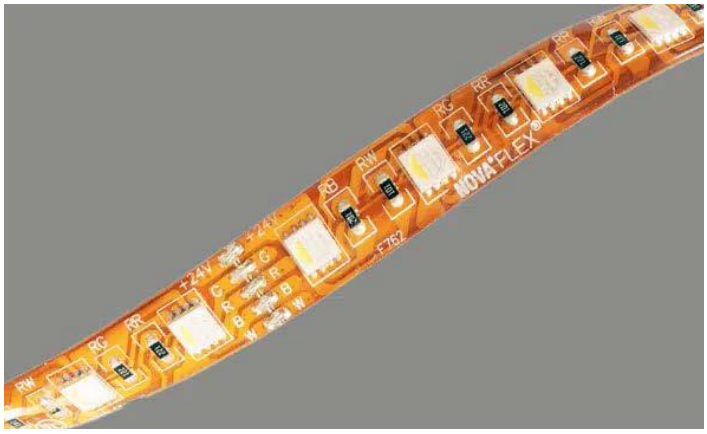

- RGBW strip provides a wide range of color changing options to help create unique, fun and branded environments
- IP65 and IP68 for indoor and outdoor use
- 3yr warranty
- cULus listed

Physical

IP Rating	IP65, IP68
Ambient Temp	-15° to 140°F (-25° to 60°C)
Mounting Options	Channels | Clips | 3M Adhesive
Cut Length	3.91” (99.3mm)
Min. Bend Diameter (top bend)	IP65: 0.79” (20mm); IP68: 1.97” (50mm)
Dimensions	See below

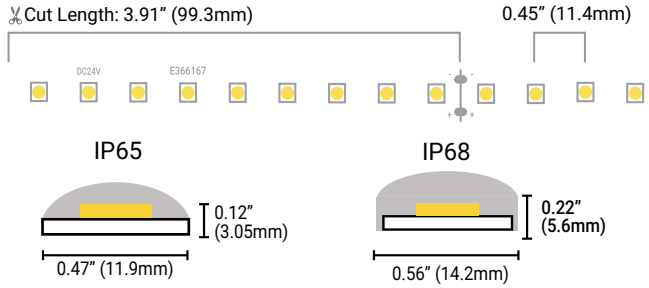

Quality, Reliability, Safety

Warranty	3 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed

Electrical

Voltage	24V
Power	4.9 W/ft
Max Run (adjusted for cut length)	19.55’ (5.96M)
Wire Quantity	5 wires
Lead Wire Options	Lead Default: 48” (1.22M) IP65: 2” minimum (50.8mm) IP68: 3” minimum (76.2mm)
Jumper	3” minimum (76.2mm)

Quick Links | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

Please note, we can run specific configurations of light and channel in our gonio, with a five day lead-time. Please consult with your Nova Flex Sales rep.

Product Overview: SKUs, Lead Times & Performance Metrics

IP65

SKU	Lead Time	Output Lm/Ft Red	Green	Blue	White
NF-RGBW-IP65-60-24V-2700K	Quick ship	35	53	13	73
NF-RGBW-IP65-60-24V-3000K	Quick ship	35	53	13	86
NF-RGBW-IP65-60-24V-3225K	Quick ship	35	53	13	80
NF-RGBW-IP65-60-24V-4100K	Quick ship	35	53	13	91
NF-RGBW-IP65-60-24V-6500K*	5-7 weeks	35	53	13	89

Actual values can vary +/- 10%.
328' MOQ.* **Less than MOQ orders can sometimes be accommodated; this can be discussed at the time of customer quote or PO

IP68

SKU	Lead Time	Output Lm/Ft Red	Green	Blue	White
NF-RGBW-IP68-60-24V-2700K	Quick ship	34	57	14	88
NF-RGBW-IP68-60-24V-3000K	Quick ship	34	57	14	107
NF-RGBW-IP68-60-24V-3225K	Quick ship	34	57	14	84
NF-RGBW-IP68-60-24V-4100K	Quick ship	34	57	14	87

Actual values can vary +/- 10%.