
COB | DRGBW

NOVA FLEX

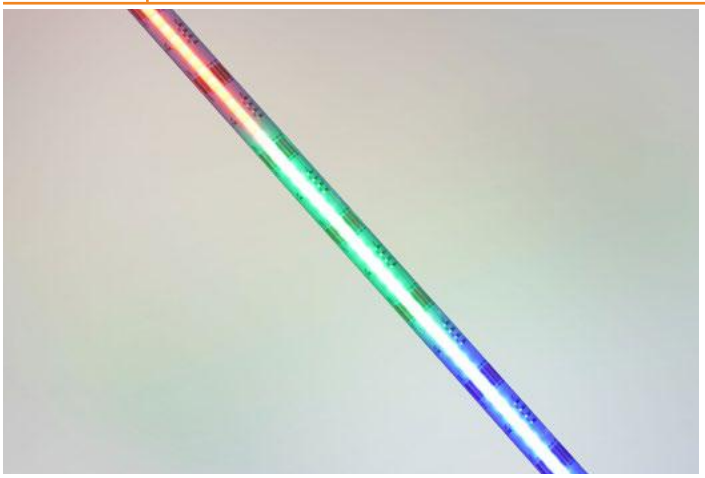



These strips combine the linearity inherent to COB with the endless color-changing effects that are possible with DRGBW, including color gradients, color chasing and color patterns.

- IP20 and IP65
- cULus listed
- 5yr warranty


Physical

Environment	IP20, IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	3.94" (100mm)
Min. Bend Diameter (top bend)	1.57" (40mm)
Dimensions	*See below*

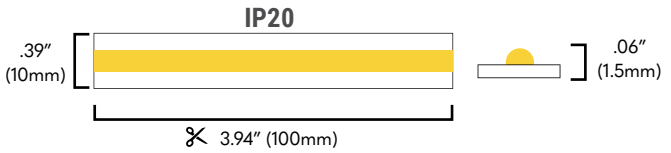

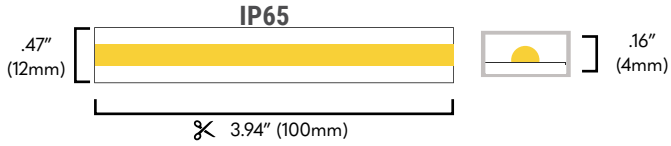

IP65 Boot Dimensions

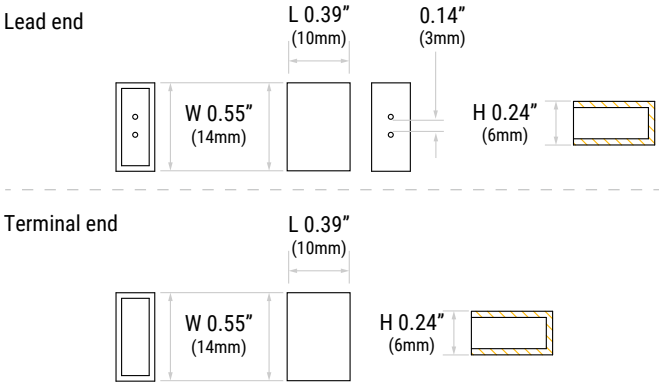

Quality, Reliability, Safety

Warranty	5 years
Lumen Maintenance (TM-21 L70 projections based on light source LM80 data)	N/A
Certifications	cULus listed

Electrical


Voltage	24V
Power	4.4 w/ft
Max Run Length adjusted for cut length	21.7' (6.61M)
Wire	3-wires
Lead Wire	Default: 48" (1.22M) IP20: 2" minimum (50.8mm) IP67: 3" minimum (76.2mm)
Jumper	3" minimum (76.2mm)

*Please Note: Controls must be compatible with the **WS 2814 chipset** used for this DRGBW COB strip*

Quick Link | For more information

Product page contains photometric files, installation guide, power and controls compatibility.

DRGBW

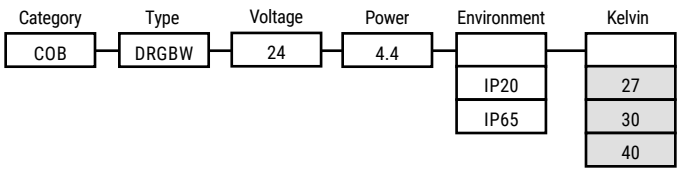

DRGBW Output

DRGBW (4.4W)			Output (W)	Output (R)	Output (G)	Output (B)
Product SKUs	*Lead Time*	*CCT*	*Lm/Ft*	*Lm/Ft*	*Lm/Ft*	*Lm/Ft*
COB-DRGBW-24-4.4-IP20-27	5-7 weeks*	2700K	67	24	89	14
COB-DRGBW-24-4.4-IP20-30	5-7 weeks*	3000K	77	27	105	16
COB-DRGBW-24-4.4-IP20-40	5-7 weeks*	4000K	76	25	71	14
COB-DRGBW-24-4.4-IP65-27	5-7 weeks*	2700K	64	23	85	13
COB-DRGBW-24-4.4-IP65-30	5-7 weeks*	3000K	73	26	99	15
COB-DRGBW-24-4.4-IP65-40	5-7 weeks*	4000K	72	24	68	13

**Note: Minimum order quantity of 82' (25M)*

Actual values can vary +/- 10%.